

The Hydrology of Geologic Sequestration

Gregory Schmaar and Stephen J. Cullen – Daniel B. Stephens & Associates Inc.

Although somewhat controversial, geologic sequestration of carbon dioxide (CO₂) is poised to become a key component of the global response to climate change. In the United States, geologic sequestration is now recognized as the only feasible approach to continued dependence on coal while mitigating CO₂ emissions. Understandably, the popularity of geologic sequestration has increased among researchers, industry, and policy advocates in the last several years, as a U.S. Department of Energy-directed research program has moved forward and the U.S. Environmental Protection Agency has begun to build a regulatory approach for these projects. However, concerns remain that geologic sequestration projects may pose a threat to groundwater and in the long-term may prove ineffective for isolating CO₂ from the atmosphere.

CO₂ has been injected underground for over 30 years to enhance oil and gas recovery, so much of the necessary infrastructure, technology, and expertise already exist. However, the gargantuan volumes of CO₂ that will have to be injected in order to mitigate anthropogenic atmospheric emissions (see sidebar) dwarf the scale of existing projects and pose several unique challenges. CO₂ injection

for geologic sequestration will likely be more closely regulated than enhanced oil and gas recovery projects, requiring substantial characterization and monitoring of the site. For example, proposed EPA regulations under the Underground Injection Control (UIC) program require the demonstration of site injectivity and long-term storage effectiveness, as well as delineation of the three-dimensional area of impact, through an iterative approach of site characterization, multiphase fluid modeling, and monitoring (EPA, 2008).

Trapping Mechanisms


CO₂ will in most cases be injected underground as a supercritical fluid—a phase state exhibiting properties of both a liquid and vapor. The injected CO₂ remains a supercritical fluid at depths greater than around 2,600 feet due to elevated temperature and pressure. At lesser depths, CO₂ exists in either liquid or gaseous form. Maintaining CO₂ as a supercritical fluid is ideal, as this results in the maximum storage of CO₂ per volume of porous media. CO₂ injectate may contain impurities, including mercury, hydrogen sulfide, and sulfur dioxide. At sufficient concentrations, these impurities may significantly alter the physico-chemical properties of the injectate.

is also expected in response to pressure differentials between the injectate and native fluids.

Several subsurface processes, collectively referred to as trapping mechanisms, may promote long-term sequestration of CO₂. These include physical containment beneath low-permeability geologic strata (caprock); trapping as a residual, non-mobile fluid phase in formation pore space (capillary trapping); dissolution of CO₂ into native groundwater; precipitation of carbon-bearing minerals (mineralization), and sorption of CO₂ onto mineral surfaces (Metz and others, 2005). In the short term, physical containment beneath caprock is essential for isolating CO₂ from overlying aquifers and the atmosphere. Over longer periods, a combination of these trapping mechanisms is expected to permanently sequester the injected CO₂.

There is some risk that injected CO₂ could escape the target storage formation and move upward toward drinking-water aquifers and the atmosphere. Abandoned well bores that penetrate the storage formation are recognized as the most likely leakage pathway for CO₂. However, CO₂ may also migrate through faults or fractures in the caprock system. Saripalli and McGrail (2002) demonstrated that an accumulated CO₂ thickness of approximately 60 feet beneath the caprock is sufficient to cause leakage into caprock microcracks or crevices 2 microns in diameter.

Compared to aqueous fluids, supercritical CO₂ has low density and viscosity. Pure-phase CO₂ plumes in the subsurface will thus be highly mobile and tend to move upward. Lateral and even downward CO₂ movement

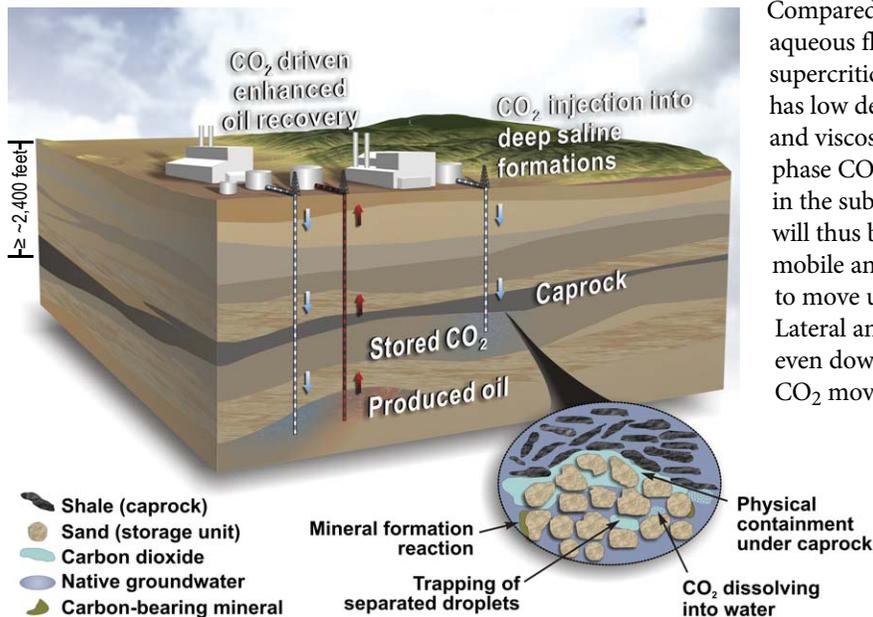

Schematic diagram illustrating the geologic sequestration of CO₂.

Project Siting

Geologic sequestration is envisioned to take place primarily in deep saline formations and oil reservoirs. More than 90 percent of storage capacity is projected to be in saline formations (Dooley and others, 2006), which are predominantly sandstone and carbonate strata containing groundwater unsuitable for drinking water (>10,000 milligrams per liter total dissolved solids). Other geologic formations of interest for sequestration include natural-gas reservoirs, unmineable coal seams, saline-filled basalts, salt caverns, and organic shales.

Although they account for less than 10 percent of potential storage capacity, oil reservoirs may be the focus of early geologic sequestration projects. Actively produced fields and so-called “depleted” reservoirs are both of interest for CO₂ storage, and some well fields may already have the required infrastructure for CO₂ injection. Oil reservoirs are also generally better characterized than deep saline formations, and are overlain by caprock sufficient to restrict the upward movement of oil and gas.

Regardless of the type of formation, a promising geologic sequestration site must have a target formation with sufficient injectivity to receive the amounts of CO₂ to be injected and be overlain by at least one caprock layer that will restrict upward flow of CO₂. The caprock structure is also important. For instance, if the strata dip too steeply, CO₂ could migrate laterally along the target formation/caprock interface. Anticlinal formations are ideal physical traps for geologic sequestration sites.

Site Monitoring

Monitoring is an essential component of the management of a geologic sequestration site, providing data related to the effectiveness of CO₂ storage as well as any risks to drinking-water aquifers and the atmosphere. Monitoring programs at geologic sequestration sites will be designed to track the evolution of injected CO₂ and any mobilized constituents, as well as formation pressure. A variety of techniques, developed for use at oil and gas well fields and contaminated sites, are available to monitor these parameters.

Monitoring for changes in pressure, aqueous geochemistry, salinity, or the presence of drinking-water contaminants will require direct access to the target formation and overlying strata via monitoring wells. However, installation of monitoring wells will be a relatively expensive part of these projects, and there is some risk that the monitoring wells themselves could become conduits for fluid movement. Therefore, a limited number of monitoring wells will likely be placed strategically in areas predicted to overlie the eventual CO₂ plume and area of elevated pressure.

Geophysical techniques have been used to monitor changes in CO₂ saturation

Can We Make a Difference?

CO₂ is released to the atmosphere by many sources, but most estimates are that around 95 percent comes from natural processes, primarily the decay of organic material. How, then, can the small fraction generated by humans make any difference? Most scientists think that until recently, the rate of CO₂ release was balanced by its absorption, primarily by plants and the ocean, keeping the atmospheric concentration relatively stable. But anthropogenic sources have upset this balance, resulting in steadily increasing concentrations that affect global climate. Thus, the focus on reducing these sources is an attempt to regain the balance. Some figures:

- Global CO₂ anthropogenic emissions, 2006: 29.2 billion metric tons (bmt) (EIA, 2009)
- U.S. CO₂ anthropogenic emissions, 2006: 6 bmt (EIA, 2009)
- U.S. CO₂ emissions from nontransportation (potentially capturable) sources, 2006: 4 bmt (EIA, 2009)
- More than 8,100 large CO₂ point sources (potentially capturable) worldwide account for more than 60 percent of all anthropogenic CO₂ emissions; they are predominantly fossil-fueled electric power plants (GTSP, 2006).
- The cumulative amount of CO₂ that would need to be stored over the next century to achieve atmospheric CO₂ stabilization is estimated to be 20 bmt in the United States and more than 100 bmt worldwide—this would require increasing current sequestration deployment by three to four orders of magnitude (GTSP, 2006).

Based on these figures, if all 8,100 large sources were captured at 80% efficiency, that would represent less than 14% of the amount needed to achieve stabilization.

References

- Energy Information Administration, 2009, Annual Energy Outlook, U.S. Dept. of Energy, www.eia.doe.gov/oiaf/aeo/.*
- Global Technology Strategy Program, 2006. Carbon dioxide capture and geologic storage. www.pnl.gov/gtsp/docs/ccs_report.pdf.*

at geologic sequestration projects (such as Doughty and others, 2008, and Bickle and others, 2007), including seismic and electromagnetic surveys. These techniques have been employed both at the ground surface and down-hole, and are capable of providing monitoring data over much larger areas than could reasonably be accessed with monitoring wells. Although geophysical methods in general will be a key component of monitoring geologic sequestration sites, no single technique is applicable to all sites. An evaluation will need to be conducted for each geologic sequestration site to determine the appropriate suite of monitoring technologies to be used.

Because leakage of CO₂ to the atmosphere and into buildings is of concern, it is likely that surface air and soil gas will be monitored in the vicinity of geologic sequestration projects. Monitoring at the surface and in the vadose zone can detect and quantify leakage of CO₂ from the target formation, and will also indicate if CO₂ has leaked into drinking-water aquifers. Surface monitoring for CO₂ may

be accomplished using an infrared gas analyzer attached to an eddy covariance tower. Soil gas may be sampled using vapor monitoring wells, and flux of CO₂ from the soil to surface air can be measured using soil-flux chambers. In each of these applications, it is important to characterize natural variability in CO₂ concentrations for comparison to monitoring data, and to collect sufficient spatial data to account for this variability.

Computational Modeling

CO₂ flow through the subsurface is extremely complex, involving multiphase fluid flow, CO₂ dissolution into groundwater, mineral precipitation and dissolution, and in some cases, geomechanical impacts. The fate and transport of CO₂ will be very site-specific, depending on geological structure and mineralogy. The transport properties of CO₂ also vary greatly with temperature and pressure. For these reasons, state-of-the-art computational modeling has been advocated as an integral tool for

see Hydrology, page 30

Hydrology, continued from page 21

managing geologic sequestration projects and understanding associated risks. Proposed U.S. EPA regulations require computational modeling results to be provided in permit applications, and ongoing model calibration to monitoring data during the lifetime of the project.

Existing model frameworks developed for multiphase flow and reactive transport problems can be applied to modeling the injection of CO₂. Modeling CO₂ injection and sequestration poses several challenges, however, such as the need to properly characterize CO₂ transport properties across a large range of temperatures and pressures, and to adequately characterize the vast subsurface areas considered for injection.

Several research studies published in the last several years have modeled the subsurface injection of CO₂ for geologic sequestration (Schnaar and Digiulio, 2009). The most comprehensive numerical models reported in peer-reviewed literature are capable of replicating formation heterogeneity

using statistical routines, CO₂ migration through artificial penetrations, hysteretic relative permeability curves and residual CO₂ trapping, and mineral precipitation and dissolution reactions and subsequent changes in formation porosity and permeability. Somewhat simpler analytical and semi-analytical models have been developed for initial site screening.

A limited number of studies (such as Doughty and others, 2008) have compared initial modeling predictions to monitoring data collected from early geologic sequestration pilot projects. These studies have demonstrated the necessity of calibrating models to monitoring data whenever feasible. For example, CO₂ is prone to traveling through high-permeability channels that may not have been identified during initial site characterization and included in the model grid. The most comprehensive understanding of the migration of CO₂ and mobilized constituents will be obtained through an integrated site characterization, monitoring, and modeling approach. ■

Contact Greg Schnaar at gschnaar@dbstephens.com.

References

- Bickle, M., A. Chadwick, H.E. Huppert, M. Hallworth, and S. Lyle. 2007. Modeling carbon dioxide accumulation at Sleipner: Implications for underground carbon storage, *Earth Planet. Sci. Lett.*, 255: 164-176.
- Dooley, J.J., R.T. Dahowski, C.L. Davidson, and others, 2006. Carbon Dioxide Capture and Geologic Storage: A Core Element of a Global Energy Technology Strategy to Address Climate Change. Battelle, Joint Global Change Research Institute, College Park, MD.
- Doughty, C., B.M. Freifeld, and R.C. Trautz, 2008. Site characterization for CO₂ geologic storage and vice versa: the Frio Brine Pilot, Texas, USA as a case study, *Environ. Geol.*, 54: 1635-1656.
- Metz, B., O. Davidson, H.C. de Coninck, and others (eds.), 2005. Carbon dioxide capture and storage, Intergovernmental Panel on Climate Change Spec. Rept., Cambridge Univ. Press, New York.
- Saripalli, P., and P. McGrail, 2002. Semi-analytical approaches to modeling deep well injection of CO₂ for geologic sequestration, *Energy Convers. Mngmt.*, 43: 185-198.
- Schnaar, G., and D.C. Digiulio, 2009. Computational modeling of the geologic sequestration of carbon dioxide, *Vadose Zone Journal*, 8: 389-403.
- U.S. EPA, 2008. Proposed rule for federal requirements under the Underground Injection Control (UIC) Program for carbon dioxide (CO₂) geologic sequestration (GS) wells, USEPA, Washington, DC. www.epa.gov/safewater/uic/wells_sequestration.html#regdevelopment.

ACZ Laboratories, Inc.

A Full Service Environmental Laboratory

ACZ is full service environmental testing laboratory with inorganic, organic and radiochemistry capabilities.

ACZ specializes in the analysis of trace level contaminants in soils, water, biota, waste and plant tissues.

Testing Capabilities Include

Low-Level Metals - Mercury 1631
TCLP/SPLP - Acid Base Accounting
In Vitro-Bioavailability of Metals
Leaching Studies - Radiochemistry



Serving the West
Since 1980

www.acz.com : sales@acz.com
(800)-334-5493



HARGIS + ASSOCIATES, INC.
HYDROGEOLOGY • ENGINEERING

Finding, Developing, Distributing and Managing Water Resources



Working to protect our most precious resource

www.hargis.com

1-800-554-2744

SAN DIEGO, CA

TUCSON, AZ

MESA, AZ